


HUAYU
RM-B773

One-key
automatic
search code
setting

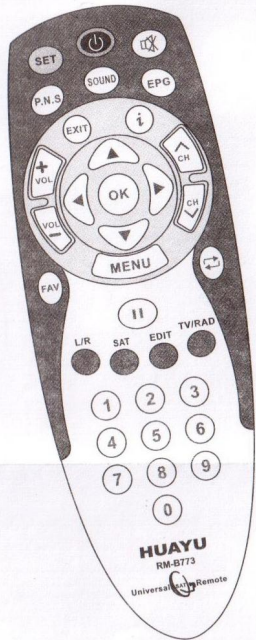

Universal Satellite Remote receiver

WWW.KRASPUL.TU

English

WWW.KRASPUL.TU
HUAYU Operating Instruction
Universal Satellite Remote receiver

RM-B773


Prelude

Thank you for using our products! It is our honour to serve you. Read the instructions carefully before using our products for convenience.

About this Remote controller


RM-B773 multi-function remote controller is the latest product for SAT. It can control almost all SAT made in China or abroad. It has functions of auto searching. With its beautiful body shape and working indicator, it is easy and convenient for you to handle.

Panel Description

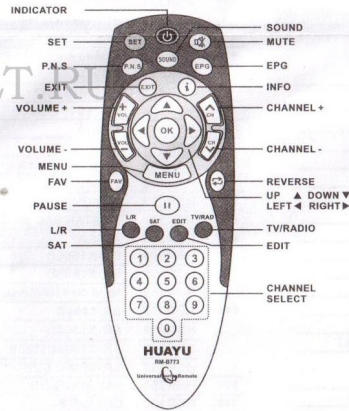

Installing the batteries

Open the battery lid and pay attention to the +/- marks. Insert two new AA(size 5) batteries (not supplied).



Note on batteries


- Do not mix old batteries with new ones or mix different types of batteries together.
- If the electrolyte leaks inside the battery compartment, clean it with a piece of cloth and replace the old batteries with new ones.
- To prevent the electrolyte from leaking, remove the batteries when you plan not to use the controller for a long period of time.
- Replaced with new batteries, previous setup will be saved. It has outage memory function.

A: Input Code

1. Please turn on SAT and make the remote face it.



2. Press "SET" and "POWER" simultaneously and don't release them until the indicator is on;



3. After that, please input the 3-digit code.



B: Auto Search

1. Press "SET" and don't release it until the indicator is on;



2. Point the remote to the SAT set;




3. Notices when the mute mark is displayed, press "SET" immediately.




C: Code Display

2. Press "SET" and "1" simultaneously then release, the indicator will flash, and the flash time is the first number of 3-digit code;



2. As the same, "SET" + "2" is the second number. "SET" + "3" is the third number.



Specifications

Operable distance: More than 8 meters.
Power requirement: Two size AAA batteries.
Dimensions: 161X46X25mm(w/h/d)
Mass: approx. 76.5g(not including batteries)

Service

If you have troubles in using the controller please contact us. We will do our best to service you. Please don't open the controller by yourself. We will not take the responsibility if you open it by yourself.

B0063383

www.huayu.cc

This company reserves the right to interpretation of the User's Manual. Design and technical parameters may vary without notice.

HUAYU

Руководство по использованию

Руководство по использованию универсального спутникового пульта ДУ


RM-B773

Резюме продукции

RM-B773 представляет собой универсальный пульт дистанционного управления приемниками

спутникового ТВ нового поколения.

Описание панели

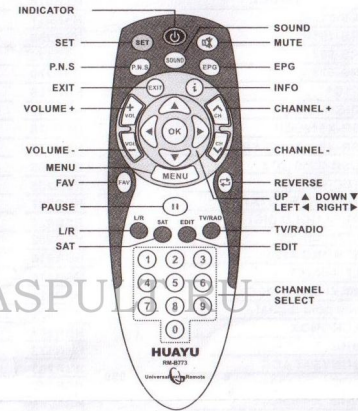


Настройка пульта ДУ:

Настоящий пульт ДУ настроится следующими способами, вы можете выбрать один из них.


Russia

A. Способ входного кода:


1. Вручную включите приемник, когда приемник находится в состоянии нормального воспроизведения, направьте пульт ДУ на приемник. Найдите трехзначный код соответствующей марки со списка кодов.



2. Нажмите, удержите кнопку "настройки", затем нажмите кнопку "питания", пока индикатор работы загорается, освободите кнопку.




3. В очереди введите первую группу трехзначных кодов. При вводе каждой цифры индикатор мигает один раз, после завершения ввода 3 цифры индикатор работы гасит. Если число групп кодов превысит 1, надо сначала выбрать первую группу кодов.



4. Проверьте другие функциональные кнопки, как кнопку "немوتы". Если другие функциональные кнопки не могут нормально работать, повторите операцию шаг № 2-3, пока не найдется подходящий код.

B. Способ авто поиска код

1. Вручную включите приемник, когда приемник находится в состоянии нормального воспроизведения, направьте пульт ДУ на приемник.



English

HUAYU

CODE	C/N	MODEL
000	HSR207	RS-210P
	HSR082	RS-101P
	HSR109	RS-501
	HSR110	RS-571
001	HSR064	F1C1
002	HSR095	DIGITAL SVR
003	HSR253	SR-X3100CU
	HSR191	SR-X550D SUPER
004	HSR359	DSB-2300-2CJ
005	HSR007	TECHNOSAT
006	HSR390	1D-FORTEC STAR
	HSR114	ALFA GOLD DIGITAL
	HSR160	LT7000D-X3
007	HSR294	STRONG 4125
	HSR300	LT7000-X3
	HSR392	MAXI DSR 9400 CA
	HSR124	alfa gold digital
008	HSR343	EUROBOX
	HSR148	NHE
009	HSR217	SONYSAT ACC
	HSR257	ACC
	HSR202	NHE
	HSR329	MATRIX
010	HSR338	D5(DAPIC)
	HSR283	DG13-A
	HSR214	INTERSTAR
	HSR195	GOLDSAT
	HSR154	GOLDSAT
011	HSR205	GOLDSAT
	HSR378	3C-SANSUNG
	HSR266	AMSTAR AM9700
	HSR240	INTERSTAR
	HSR433	STAR SAT 190
	HSR434	STAR SAT
012	HSR272	STRONG DVB
013	HSR231	RC-R10-0A
014	HSR097	T-4400
	HSR179	LAWRENCE LT 7000D PLUS
	HSR096	RC6500
015	HSR170	SAMSUNG
	HSR151	SAMSUNG(HY-2927)
	HSR143	TRUMAN
016	HSR357	2A-ECHOSTAR
	HSR074	ECHOSTAR1100-2100
	HSR122	STAR SAT 2CI
017	HSR311	VTC-DT H1H
	HSR328	EURO-BOX
	HSR067	SR-555
018	HSR379	HSR379
	HSR172	TECHNOSAT
	HSR261	TECHNOSAT
019	HSR028	GREY-CASE
	HSR029	POWER-SKY
	HSR030	DKSAT

HUAYU

CODE	C/N	MODEL
020	HSR368	STAR TRACK
	HSR107	FORTEC STAR
	HSR344	ASTRASAT
	HSR281	AAA
	HSR023	TOPLINE
	HSR024	STGNAL444
	HSR181	STAR AS
	HSR174	BEAUSAT-2006-2007
	HSR193	G-BOX
021	HSR258	G-BOX SA1
	HSR291	BEAUSAT
	HSR308	FORTEC STAR

CODE	C/N	MODEL
022	HSR158	GOLDSAT2
	HSR327	SIGNAL SR-444
	HSR008	MAX(RC18)
023	HSR014	SX-5500
	HSR077	SR-X3200CU
	HSR078	STAR SAT SR-X3500CUCI
	HSR237	VIVAX
024	HSR293	SAMSAT
	HSR176	DVB-C1
025	HSR270	ASTROVOX 2600
	HSR190	ORBICLE
026	HSR053	DIGITAL TELECOM
	HSR075	900 SERIES
027	HSR076	911 SERIES
	HSR265	PRIMA
028	HSR255	PRIMA
	HSR287	PAUXIS
	HSR026	SUCCESS 8800
029	HSR232	SUCCESS
	HSR016	ECHOSTAR 1200/2200
	HSR276	MAGIX
	HSR027	STRONG
	HSR320	STRONG
	HSR204	PATRIOT II
	HSR173	RC33H-STAR SAT
030	HSR203	PATRIOT II (RC1412)
	HSR262	RC03H
	HSR264	PATRIOT II (RC1412)
	HSR268	MEDIACOM (RC1405)
	HSR216	ECHOSTAR
	HSR342	B-TELR77
031	HSR223	GOLDSAT
	HSR224	VENUS D/3
032	HSR285	DG R-3
	HSR252	ATL(MATRIX)
033	HSR225	TANAKA
034	HSR277	YWO220
035	HSR159	DADSAT
	HSR115	RC06A
	HSR167	LAWRENCE LT 7000D
036	HSR325	LT-7000D
	HSR089	ALFA-GOLD

HUAYU

CODE	C/N	MODEL
037	HSR090	T-1020
	HSR323	GENERAL DELUXE
	HSR192	STAR SAT(RC2402)
	HSR137	VSR-2500 FTA
	HSR206	RC032(TOP SAT)
	HSR169	RC2402
	HSR435	HSR435
	HSR389	(SR-X4000D) (STAR SAT)
	HSR350	SR-X4000D
038	HSR406	SR-X5100D
	HSR439	SR-X7300CU
	HSR440	SR-X7100CU
039	HSR290	TOP SATII
040	HSR307	DF211-50
	HSR374	PAUXIS
041	HSR180	VSR-2500 FTA
	HSR385	SR-X1500 SUPER MK-II
042	HSR280	DG9 AAA
043	HSR278	GRANASAT GEOSAT
044	HSR340	ACIKO
	HSR189	CITIZEN 150
045	HSR211	C16
	HSR312	BK3B-C17
046	HSR140	PENTAX
	HSR098	NEWMAX
	HSR282	HSR282
	HSR103	SKY-1
	HSR186	STRONG 4620
	HSR194	STRONG
	HSR229	TM150

HUAYU

CODE	C/N	MODEL
047	HSR243	AM-1500ZX
	HSR302	X5
	HSR306	STAR TRACK 550D
	HSR358	STAR TRACK 550D
	HSR282	DG19 HYUNDAI
	HSR316	STRONG
	HSR324	FUJISAT
	HSR130	STRONG
048	HSR297	NEOSAT 5500
049	HSR126	ALFA GOLD
050	HSR121	EURO-BOX
	HSR299	EURO-BOX
051	HSR152	LT-9400
052	HSR071	ECHOSTAR AD-20001P
053	HSR168	SUPERMAXSAT
	HSR315	TOPSAT
054	HSR391	DANSAT
	HSR043	MEDIACOM
055	HSR044	RC04A
	HSR079	RC 37B
056	HSR081	TOPFIELD 3100
	HSR055	TF-2000CI
	HSR106	HYUNDAI
	HSR200	EE ZEE SAT
057	HSR317	DX-5600
	HSR102	TECHNOSAT6000
	HSR397	HSR397
	HSR184	GOLDI
058	HSR298	SMART
	HSR373	RC9000/9800
	HSR042	RT04
059	HSR153	ECHO1500
060	HSR118	SV-1495
061	HSR380	STAR SAT
062	HSR066	D-2100 2CI
	HSR360	5A-DSB 1000-2CI
063	HSR015	TOP FIELD(RC-37A)
	HSR354	UBCTRUE
064	HSR117	PANSAT
065	HSR387	K12G-C10
	HSR070	STAR SAT 150D
066	HSR269	SIGNAL
	HSR163	EM-TEK
	HSR213	BENJAMIN
067	HSR288	SKY VIEW
	HSR310	BEAUSAT
068	HSR088	RC-28E
069	HSR131	FORTEC STAR 5100
	HSR157	FORTEC STAR
	HSR238	PREMIUMX
070	HSR263	PREMIUMX
	HSR239	VIVAX
071	HSR178	KYOTO
	HSR196	GALAXY 2000D
072	HSR031	SR-5700LT
	HSR080	SAMSAT
073	HSR054	OPENTEL
	HSR056	OPENTEL
074	HSR101	EUROSTAR ANALOUG
	HSR018	BEAUSAT
	HSR022	DANSAT G.3
	HSR025	G-5
075	HSR188	CITIZEN 5200
	HSR201	NH 9860
	HSR296	IDANSAT G5.G7
	HSR326	DANSAT G.4.5.6.7.8.9
	HSR375	ST-201
076	HSR361	10A-STAR SR-X10D
077	HSR144	SAMSUNG
078	HSR135	MARS-888CI
	HSR175	TECHNOSAT(RC36A)

HUAYU

CODE	C/N	MODEL
079	HSR065	TECHNOSAT RC-36C
	HSR230	MATRIX STARLINK
	HSR284	TECHNOSAT
	HSR295	NEWMAX550
	HSR305	TECHNOSAT
	HSR393	NEWMAX5500
	HSR267	TECHNOSAT
080	HSR086	TECHNOSAT 7000
	HSR233	TECHNOSAT
081	HSR314	BEAUSAT
	HSR197	RTG ORBIT 2002
	HSR219	ACC
082	HSR220	ACC131
	HSR228	ACC 114
083	HSR321	TECH VIEW
084	HSR136	FUJISAT (RC 11A)
085	HSR222	GSRM-1600
	HSR398	STAR
086	HSR139	STRONG 450
087	HSR147	ECHOSTAR
088	HSR396	REC5025
089	HSR161	ROHIRA RECIEVER
	HSR091	RC27A
090	HSR235	ARC BIG SA7
091	HSR156	LT-7600PLUS
092	HSR045	NOKIA
093	HSR104	METABOX
	HSR187	CT-R1200 ULTRA
094	HSR085	T-8000-S-SlimD
095	HSR092	BEAUSAT 2CI
096	HSR367	3B-STAR SAT SR-X2200IR
097	HSR234	ARISAT
	HSR099	SR-X1500D
	HSR100	SR-X1600D
	HSR162	OMAX OM-R100 ALPHA(STAR SAT)
098	HSR177	SR-1500D
	HSR256	SR-X1500D
	HSR259	SR-X1500D/1600
	HSR249	SR-1500D SUPER MK-II
099	HSR353	GOLD VISION
100	HSR183	BK3B-C4
101	HSR146	TECHNOSAT 9000
102	HSR198	ITN DSR9700D
103	HSR132	BK3A-C8
104	HSR289	ECHOSMAR
105	HSR063	VS-9600PLUS
106	HSR068	ECHOSTAR
107	HSR192	RC2402
108	HSR192	AD-7300 PLUS
109	HSR180	SHOWNIC
110	HSR322	OPEN SKY
111	HSR123	NOKIA
112	HSR147	ECHOSTAR
113	HSR399	HSR399
114	HSR060	SV-1485
	HSR094	T-IR3000
115	HSR108	NEW9000
	HSR150	PAMSAT
116	HSR113	NEOSAT 912 SUPER
117	HSR166	RC1407

HUAYU

CODE	C/N	MODEL
118	HSR385	SR-X1500 SUPER MK-II
119	HSR171	SV-1480
	HSR199	ONWA
	HSR226	RSTROVOX

CODE	C/N	MODEL
120	HSR274	MICRO-X
	HSR355	RSTROVOX
	HSR356	1A-STAR PORT
121	HSR246	TOPSAT
122	HSR301	XSAT
123	HSR331	KALLEY
124	HSR332	MICRO-X
125	HSR336	SuperMax
126	HSR366	2B-SATAR SAT SR-X2100CU
127	HSR382	DVD-2527&DIGITAL VISION
128	HSR384	SV-29T29
129	HSR386	RM009D
130	HSR388	2C-SAMSAT
	HSR400	OPENBOX
131	HSR432	OPENBOX
132	HSR401	DYNASAT
133	HSR405	STAR COM SR-X1900D
134	HSR408	WIZ TECH
135	HSR411	TOPFIELD
136	HSR220	ACC131
137	HSR414	ZM7296
138	HSR415	ZM7221
139	HSR416	IPM
	HSR418	Golden Interstar
140	HSR423	DSR 8005-7800
	HSR422	PROWEST
141	HSR428	RC6500
142	HSR430	BIG SAT
143	HSR134	OPENTEL NEW
144	HSR309	06-0225



Batteries: AAA x 2